

jurnal 6

by Aip 0030

Submission date: 15-Apr-2022 10:04PM (UTC+0700)

Submission ID: 1811449471

File name: 6._Prosiding_AIP_Conference_Proceedings_2255_030030.docx (241.44K)

Word count: 2295

Character count: 11492

Analysis of Utilization of Low Grade Bioethanol and Oxygenated Additives to COV and Heat Release Rate on SI Engine

Iqbal Yamin¹, Bambang Sugiarto^{1, a)}, Muhammad Taufiq Suryantoro², Setia Abikusna¹, and Shafyandra Farras Maulidina¹

¹ Department of Mechanical Engineering, Universitas Indonesia Kampus Baru UI Depok, Depok 16424 Indonesia

² Balai Teknologi Termodinamika Motor dan Propulsi, Badan Pengkajian dan Penerapan Teknologi, Gedung 230, Kota Tangerang Selatan, Banten 15314

^aCorresponding Author: bangsugi@eng.ui.ac.id

Abstract. One of the main factors that cause the earth that we live in is not as clean as it was before is the utilization of fossil fuel. Motorized vehicle still utilizes fossil fuel as energy sources, and the number of motorized vehicles is growing every year. Biomass energy are one of the alternative energies currently being developed. Bioethanol are one of the technologies for fuel in motorized vehicles to utilize biomass as an alternative energy. The addition of bioethanol to gasoline will certainly change the fuel properties, the fuel will be more difficult to self-ignite so the pressure generated in the combustion chamber will be more consistent. Coefficient of variation (COV) represent the ratio of the standard deviation to the mean of a set of data, in this study in cylinder pressure data (IMEP) is used. Based on previous research that discussed the analysis of emission gas and fuel consumption on SI engine fueled with low-grade bioethanol and oxygenated additive, the authors examined further to analyze the characteristic of ethanol blend and oxygenated additive to COV_{IMEP} and Heat Release Rate (HRR) of various fuel mixture as well as COV_{IMEP} correlation with HRR at variable engine speed were investigated. The result show that compared with pure gasoline, ethanol blend decreases HRR. When oxygenated additive added to gasoline – ethanol blend, it increases its maximum heat release rate especially on fuel mixture E5. And the Correlation of COV and HRR; as COV value increases, HRR decreases. Whereas, when COV value decreases, HRR increases.

INTRODUCTION

The earth that we live in is not as clean as it was before, the utilization of fossil fuel for motorized vehicle are one of the reasons. Motorized vehicle still utilizes fossil fuel as energy sources, and the number of motorized vehicles is growing every year [1]. Biomass energy are one of the alternative energies currently being developed. Bioethanol are one of the technologies for fuel in motorized vehicles to utilize biomass as an alternative energy. The addition of bioethanol to gasoline will certainly change the fuel properties, the fuel will be more difficult to self-ignite [2] so the pressure generated in the combustion chamber will be more consistent. Coefficient of variation (COV) represent the ratio of the standard deviation to the mean of a set of data [3], in this study in cylinder pressure data (IMEP) is used.

Palmer, FH [4] reported that during low speed acceleration, oxygenated fuel blend gave a better anti-knock performance than hydrocarbon fuel of similar octane range. Srinivasan, et al [5] investigates the effects of ethanol-blended gasoline with oxygenated additives on a multi – cylinder Spark Ignition (SI) Engine. The experiment shows that for the sole fuel, the rate of heat release was faster and reached a peak at 15° after TDC which was 10° earlier than that of the ethanol-blended gasoline fuel, Subsequently, the heat release rate came down sharply on account of the amount of unburnt fuel available due to the quenching effect. This is one of the main reasons for the reduction in the heat release rate in ethanol–gasoline blended fuels.

In the previous research, distillation of low grade bioethanol with compact distillator were experimented [6] up to the analysis of emission gas and fuel consumption on SI engine fueled with low-grade bioethanol and oxygenated additive was discussed [7]. In this research, the authors examined further to analyze the characteristic of ethanol blend and oxygenated additive to COV_{IMEP} and Heat Release Rate (HRR) of various fuel mixture as well as COV_{IMEP} correlation with HRR at variable engine speed were investigated.

COEFFICIENT OF VARIATIONS

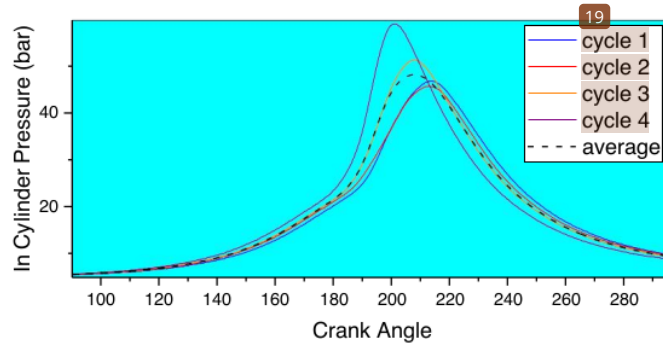


FIGURE 1. Crank Angle vs Cylinder Pressure

Figure 1 show a curve of cylinder pressure against the rotation of crank angle in 4 consecutive cycle, it shows that maximum pressure for every cycle is different. The reason for this is that there is a possibility that the fuel in the cylinder does not burn at the same level. Using statistical method coefficient of variations (COV) to represent the ratio of the standard deviation to the mean of a set of data, combustion process of every cycle can be analyzed with a variation of data in cylinder pressure (IMEP) experimented. Indicative Mean Effective Pressure (IMEP) and Pmax important parameters and are commonly used as a measure of cyclic variation [8]. It should be noted that Pmax is also a feedback signal in a closed loop control system.

$$COV = \frac{\sigma_{IMEP}}{\mu_{IMEP}} \times 100 \quad (1)$$

The standard deviation (σ) is the square root of the average arithmetic of the square of the deviation from the mean (μ), and the variance (σ^2) is the square of the standard deviation. Coefficient of variance (COV) is defined as the ratio of the standard deviation to the mean value. To produce the effect of cyclic variation in combustion, work only given to piston during the compression and expansion steps, therefore COV is calculated as the standard deviation of the IMEP calculated between the closure of the intake valve and the opening of the exhaust valve, divided by average IMEP and is usually expressed in percent.

EXPERIMENTAL METHOD

The engine used in this study is spark ignition (SI) engine single cylinder 125 cc single overhead camshaft (SOHC) with electronically controlled fuel injection system. General specification of the test engine can be seen in Table 1.

TABLE 1. General Specification of test Engine

| General Specification | Parameter |
|-----------------------|---------------------------------|
| Engine type | 4 stroke, SOHC, single cylinder |
| Displacement | 125 cc |
| Bore x stroke | 52.4 mm x 57.9 mm |
| Compression ratio | 9.3:1 |
| Max output | 7.4 kW / 8000 RPM |
| Max torque | 9.3 Nm / 4000 RPM |
| Fuel system | Fuel injection (PGM-FI) |

The fuel used is 7 types of the gasoline-bioethanol mixture prepared based on variable mixing ratio from RON 88, ethanol quality by volume, with a mixture of E5, E10, and E15, as well as the addition of oxygenated additive

cyclohexanol (C₆H₁₂O) with a composition of 0.5 % on each fuel mixture (E5++, E10++, E15++). The mixture is formed in the fuel tank and inlet manifold. So, the level premix is quite high and almost constant. Therefore, mass flow rates can be measured and controlled at once. Testing the properties of fuel from various gasoline-bioethanol mixtures is carried out. The results of testing various fuels are as shown in Table 2.

TABLE 2. Fuel Characteristic Test

| Parameter | | E0 | E5 | E10 | E15 | Method |
|---------------------------|-------------------|-------|-------|-------|-------|-------------|
| RON | | 87.9 | 90.5 | 93.6 | 96.5 | ASTM D 2699 |
| Oxygen content | %m/m | 0 | 1.8 | 4 | 5.9 | ASTM D 4815 |
| Vapor pressure | kPa | 48.6 | 38.8 | 68.7 | 65.8 | ASTM D 323 |
| Specific gravity on 15 °C | kg/m ³ | 718.4 | 728.1 | 745.8 | 748.7 | ASTM D 4052 |

Cylinder combustion pressure is measured using a Kistler 6617B piezo-electric sensor (maximum pressure up to 200 bars) and recorded by the LabVIEW acquisition system. The crank position angle (up to 720 crank angles) is acquired with the shaft encoder; the sequence is adjusted to synchronize the cylinder combustion pressure signal with the crankshaft angle. The temperature sensor unit with the K type thermocouple is used to monitor the temperature of the exhaust gas, fuel, lubricant, and spark plug. This machine is connected to the engine dynamometer for power, torque and fuel consumption analysis. It is connected to the QROTECH-401 (4/5 gas analyzer) to measure the content in exhaust gases such as Carbon Monoxide (CO), Carbon Dioxide (CO₂), Hydrocarbons (HC), and excess air (O₂). Analysis of the air-fuel ratio is done by installing a lambda sensor (oxygen sensor) in the exhaust manifold. Figure 2 is an experimental set-up chart on a 125 cc SI engine connected to other supporting components.

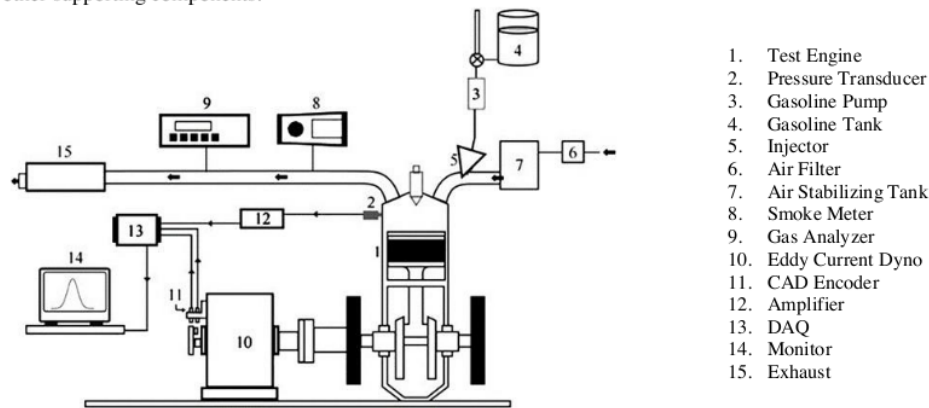


FIGURE 2. Experimental Set-up SI Engines

This experimental test is carried out after running the engine until it reached a steady state, where the oil and cooling water temperatures were at 50 °C. The throttle valve opening is maintained at 30%, and the ignition timing is controlled according to the ignition system in the fuel injection control. As for engine speed variations at 4,000 rpm up to 8,500 rpm with engine speed increases every 500 rpm. This engine speed variation is to see conditions from low, medium, to high speed.

RESULT AND DISCUSSION

The characteristic of ethanol blend and oxygenated additive to COV_{IMEP} and heat release rate of various fuel mixture as well as COV_{IMEP} correlation with HRR at variable engine speed were investigated.

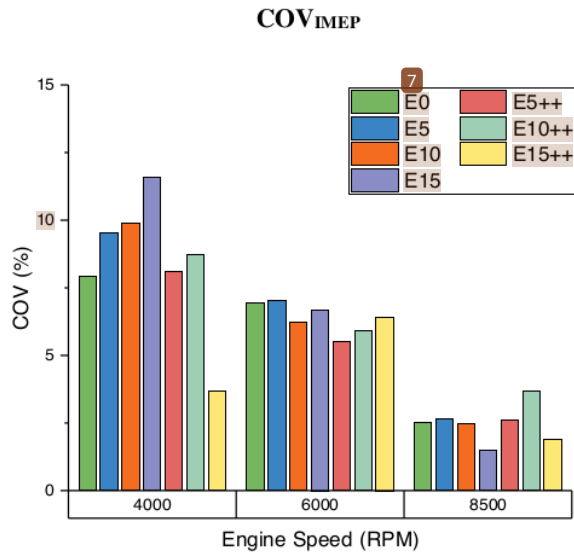
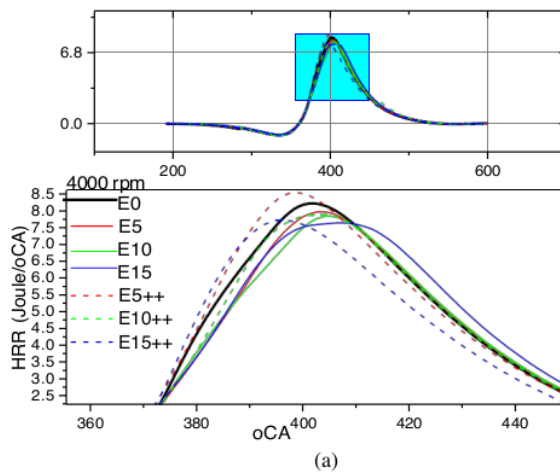


FIGURE 3. COV vs Engine Speed

COV_{IMEP} from an experimental test for every fuel mixture on engine speed 4000, 6000 and 8500 RPM can be seen in Fig. 3. Figure 3 show that additions of oxygenated additive on E15 fuel mixture can decrease COV in engine speed 4000 rpm with value 3.67%, decreased 4.27% compared to E0. And in engine speed 6000 rpm, additions of oxygenated additive on E5 fuel mixture decreases COV 1.42% compared to E0. While in engine speed 8500 rpm on E15 fuel mixture, it decreases COV 1.01% compared to E0. Lower COV value indicate that the least variation in combustion pressure occurs.

Heat Release Rate




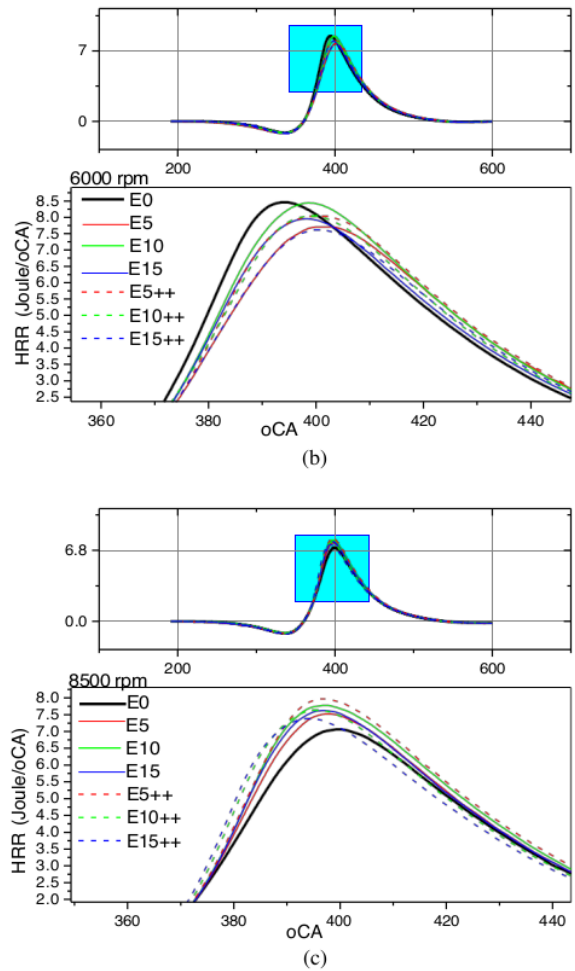


Figure 4. Heat Release Rate in engine speed; 4000 rpm (a), 6000 rpm (b) and 8500 rpm (c)


1 The effect of the gasoline-ethanol with oxygenated additives blends on Heat Release Rate is shown in Fig. 4. It can be seen that compared with pure gasoline, ethanol blend decreases HRR. In engine speed 4000 rpm and 6000 rpm, it can be seen that as ethanol concentration increases the rate of heat release decreases. This is due to the properties of ethanol which have lower heating value than gasoline. When oxygenated additive is added to gasoline-ethanol blend, it increases its maximum heat release rate especially for fuel mixture E5. In engine speed 4000 rpm, all fuel mixtures with oxygenated additive have a higher and faster HRR. While in engine speed 6000 rpm and 8500 rpm, fuel mixtures E10 and E15 with additive have a lower and slower HRR.

COV vs HRR


18 The Correlation of COV and HRR can be seen in Fig. 5. It can be seen that in engine speed 4000 rpm and 6000 rpm; as COV value increases, HRR decreases. Whereas, when COV value decreases, HRR increases. It shows that lower COV value indicates that the least variation in combustion pressure occurs so the combustion process is improved and HRR increased.

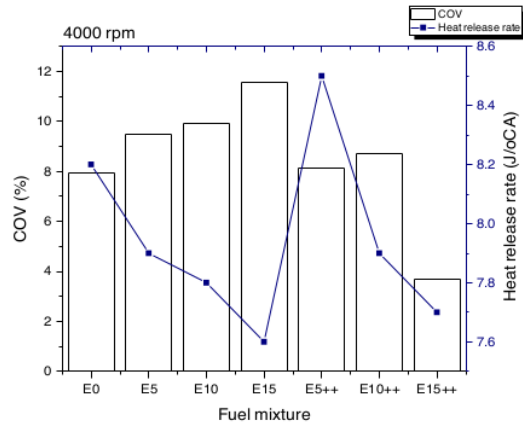

(a)

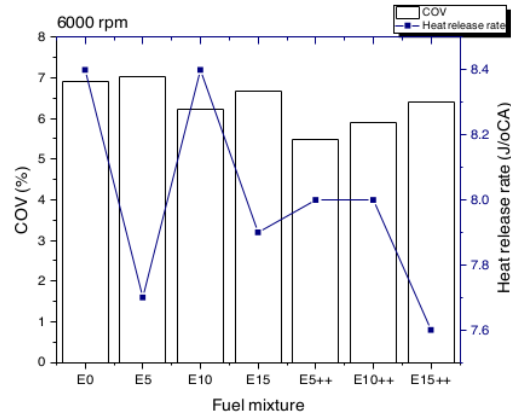

(b)

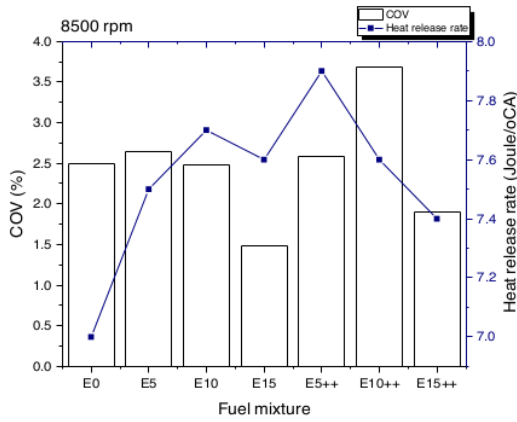

(c)

Figure 5. COV vs HRR; 4000 rpm (a), 6000 rpm (b) and 8500 rpm (c)

CONCLUSION

The following conclusions can be made from this study, ethanol blend and oxygenated additives in gasoline decrease variation in combustion pressure occurrences, lower COV. Compared with pure gasoline, ethanol blend decreases HRR. When oxygenated additive added to gasoline – ethanol blend, it increases its maximum heat release rate especially on fuel mixture E5. And the Correlation of COV and HRR; as COV value increases, HRR decreases. Whereas, when COV value decreases, HRR increases. It shows that lower COV value indicate that the least variation in combustion pressure occurs so the combustion process improved and HRR increased.

ACKNOWLEDGEMENT

The authors would like to thank PITTA UI for providing the grant in this research so that it can be completed well.

REFERENCES

1. Statistik, B.P., *Perkembangan Jumlah Kendaraan Bermotor Menurut Jenis tahun 1949-2016*. 2018, Diakses <https://www.bps.go.id>
2. Szybist, J.P., D.A.J.C. Splitter, and Flame, *Pressure and temperature effects on fuels with varying octane sensitivity at high load in SI engines*. 2017. **177**: p. 49-66.
3. Ekeş, A., *Data Science with R: A Step By Step Guide With Visual Illustrations & Examples*. 2018.
4. Palmer, F. *Vehicle performance of gasoline containing oxygenates*. in *INTERNATIONAL CONFERENCE ON PETROLEUM BASED FUELS AND AUTOMOTIVE APPLICATIONS. IMECHE CONFERENCE PUBLICATIONS 1986-11. PAPER NO C3* 86. 1986.
5. Srinivasan, C.A., C.J.J.o.S.E. Saravanan, and Environment, *Study of combustion characteristics of an SI engine fuelled with ethanol and oxygenated fuel additives*. 2010. **1**: p. 85-91.
6. Abikusna, S., et al. *Low grade bioethanol for fuel mixing on gasoline engine using distillation process*. in *AIP Conference Proceedings*. 2017. AIP Publishing.
7. Monasari, R., et al. *Analysis of emission gas and fuel consumption on SI engine fueled with low-grade bioethanol and oxygenated cycloheptanol additive*. in *IOP Conference Series: Earth and Environmental Science*. 2018. IOP Publishing.
8. Heywood, J.B., *Internal combustion engine fundamentals*. 1988.

ORIGINALITY REPORT

18%

SIMILARITY INDEX

13%

INTERNET SOURCES

13%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

1

www.tci-thaijo.org

Internet Source

5%

2

Kaleli, Alirıza, Mehmet Akif Ceviz, and Köksal Erenturk. "Controlling spark timing for consecutive cycles to reduce the cyclic variations of SI engines", Applied Thermal Engineering, 2015.

Publication

2%

3

www.neliti.com

Internet Source

1%

4

hdl.handle.net

Internet Source

1%

5

www.mooremotorcycles.co.uk

Internet Source

1%

6

cyberleninka.org

Internet Source

1%

7

Sumit Taneja, Ankit Parmar. "Analysis of the engine characteristics of a variable compression ratio SI engine fuelled with

1%

various gasoline-ethanol blends", AIP
Publishing, 2019

Publication

8

Wen, L.b.. "The effect of adding dimethyl carbonate (DMC) and ethanol to unleaded gasoline on exhaust emission", Applied Energy, 201001

Publication

1 %

9

kalasalingam.ac.in

Internet Source

1 %

10

www.undp.ps

Internet Source

1 %

11

Faqih Rofii, Gigih Priyandoko, Istiadi, Mohammad Ifan Fanani. "Modeling of Convolutional Neural Networks for Detection and Classification of Three Vehicle Classes", Journal of Physics: Conference Series, 2021

Publication

1 %

12

Mingfa Yao, Bo Zhang, Zunqing Zheng, Zheng Cheng, Yuan Xing. "Experimental Study on the Effects of EGR and Octane Number of PRF Fuel on Combustion and Emission Characteristics of HCCI Engines", SAE International, 2005

Publication

1 %

13

bmcinfectdis.biomedcentral.com

Internet Source

<1 %

| | | |
|----|---|------|
| 14 | ebin.pub Internet Source | <1 % |
| 15 | www.ijjmme.com Internet Source | <1 % |
| 16 | www.motorcycleonline.com.my Internet Source | <1 % |
| 17 | J. O. Igbokwe, O. C. Nwufu, C. F. Nwaiwu, C. Ononogbo, K. M. D. Ezeji, E. E. Anyanwu. "Performance characteristics of a single cylinder spark ignition engine fuelled with ethanol-petrol blends at constant engine speed", <i>Biofuels</i> , 2016 Publication | <1 % |
| 18 | Xin Yuan, Jiahao Chen, Wei Liu, Christopher H. T. Lee. "A Linear Control Approach to Design Digital Speed Control System for PMSMs", <i>IEEE Transactions on Power Electronics</i> , 2022 Publication | <1 % |
| 19 | carep.ac-creteil.fr Internet Source | <1 % |
| 20 | www.intechopen.com Internet Source | <1 % |
| 21 | R.R. Raine, C.R. Stone, J. Gould. "Modeling of nitric oxide formation in spark ignition engines with a multizone burned gas", <i>Combustion and Flame</i> , 1995 | <1 % |

22

Hiroaki Yonetani, Kaoru Hara, Itaru Fukutani.
"Hybrid Combustion Engine with Premixed
Gasoline Homogeneous Charge and Ignition
by Injected Diesel Fuel - Exhaust Emission
Characteristics -", SAE International, 1994

Publication

<1 %

23

Mariefel V. Olarte, Karl O. Albrecht, J. Timothy
Bays, Evgueni Polikarpov et al. "Autoignition
and select properties of low sample volume
thermochemical mixtures from renewable
sources", Fuel, 2019

Publication

<1 %

Exclude quotes On

Exclude matches < 5 words

Exclude bibliography Off